


396-6539Y1 Interplant Manifold Valve Shut Off Kit

Kit Number: 520-00-150300 Kit Description: *Interplant Manifold Valve Shut Off Kit*

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|-------------|-----------------|--------------------------------------|------|
| 1 | 100-075NIP-SH | 3/4" Short Poly Nipple | 1 |
| 2 | 100-075TEE | 3/4" Poly Tee | 1 |
| 3 | 101-075075 | 3/4" MPT x 3/4" HB | 3 |
| 4 | 102-075SUBV | 3/4" Union Valve 2 Way | 1 |
| 5 | 100-075075SL-90 | 3/4" Street Elbow - 90 Degree | 1 |
| 6 | 350-1208 | SS Hose Clamp - 12 - 1-1/4" Diameter | 3 |

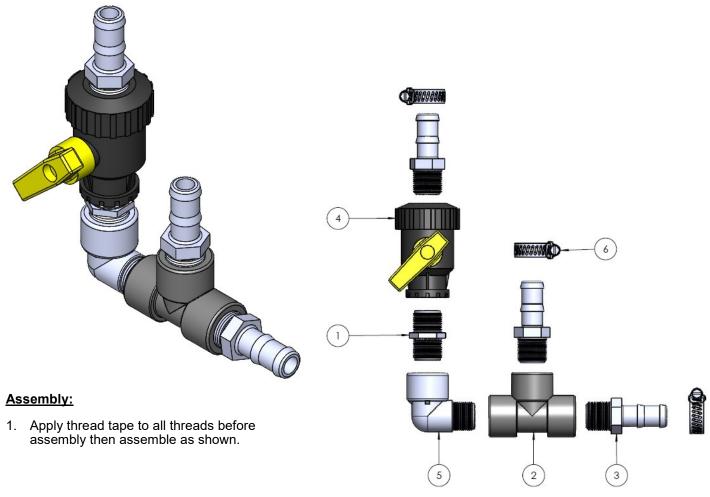


Revised: 2/23/2024

Sure Point Ag Systems

Installation Instructions

Interplant Shut-off Installation instructions:

- 1. Assemble Kit as shown on page 1.
- 2. Mount Flow Indicators in a manner so as interplant Rows Are fed Separately from the fixed rows
- 3. Install Shut-off kit as show in the picture Below using 3/4" hose and hose clamps.

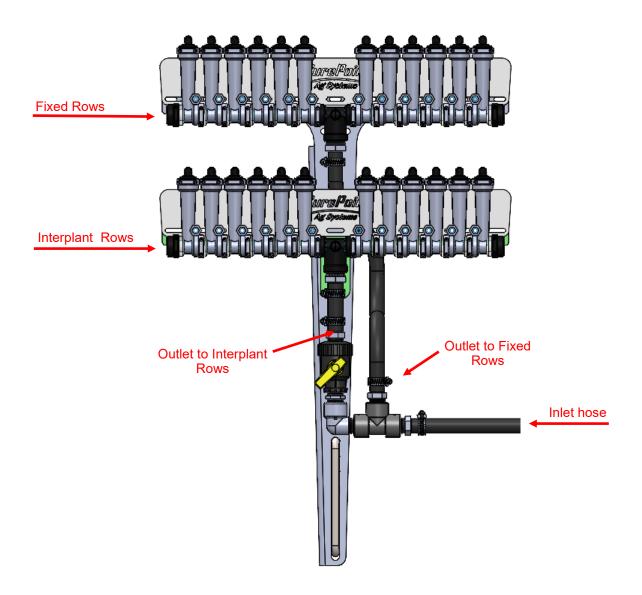

Revised: 2/23/2024