

396-2872Y1 John Deere 2510H Nutrient Applicator 300 Gallon Oval Tank Mounting Instructions

Kit Number: 528-01-050150





SurePoint Ag Systems Fertilizer Tank Safety and Warnings



SurePoint Ag Systems <u>does not</u> recommend transporting your implement with full fertilizer tanks. Doing so can result in damage to brackets and implement.



Remember to wear proper PPE (*Personal Protective Equipment*) when installing SurePoint Ag Systems fertilizer tank kits. Proper PPE includes gloves, foot and eye protection, and hearing protection.


SurePoint Ag Systems fertilizer application systems require winterization when not in use. Refer to your product manual for winterization procedures.

Failure to follow the above warnings can result in personal injury, damage to your SurePoint Ag Systems products, and damage to your implement.




Parts List and Exploded View 528-01-050150

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|------------------|---|------|
| 1 | 727-08-OT0300-31 | 300 Gallon Oval Tank OT0300-31 (STD. Fittings 3/4 and 1 1/4") | 1 |
| 2 | 421-2763Y1 | 300 Gallon Oval Cradle | 1 |
| 3 | 420-2769Y1 | JD 2510H Rear Tank Stand - 300 Gallon Oval Tank Cradle | 1 |
| 4 | 420-2766Y1 | JD 2510H Front Tank Stand - 300 Gallon Oval Tank Cradle | 1 |
| 5 | 380-1041 | 5/8" x 4" x 7-1/2" Square Bend U-Bolt | 8 |
| 6 | 300-100108-5 | 5/8" x 1-1/2" Bolt G5 | 12 |
| 7 | 323-10 | 5/8" Flange Nut | 12 |
| 8 | 525-2055 | 2" Strap Kit for Tanks under 300 Gallon | 1 |

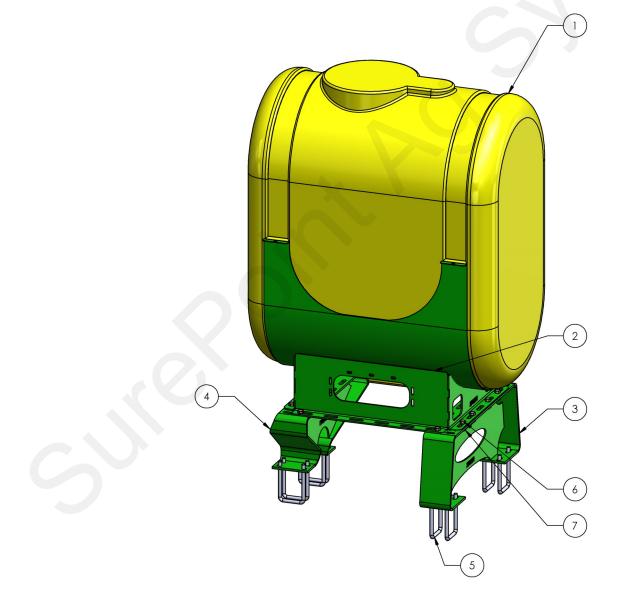




Step by Step Instructions

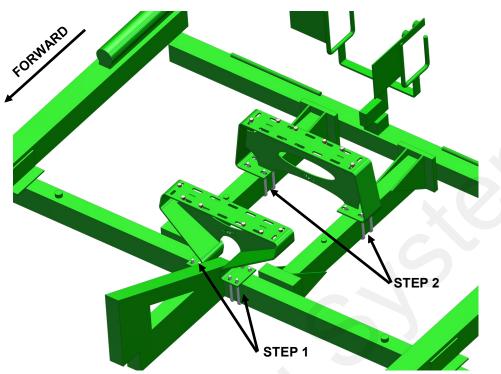

- 1. Mount the Front Tank Stand (420-2766Y1) with the supplied Square Bend U-bolts (380-1041) as shown in picture above. Fully tighten U-bolts.
- 2. Mount the Rear Tank Stand (420-2769Y1) with the supplied Square Bend U-bolts (380-1041) as shown in picture above. Do not fully tighten U-bolts to allow for adjustment when mounting the Tank Cradle in Step 3.

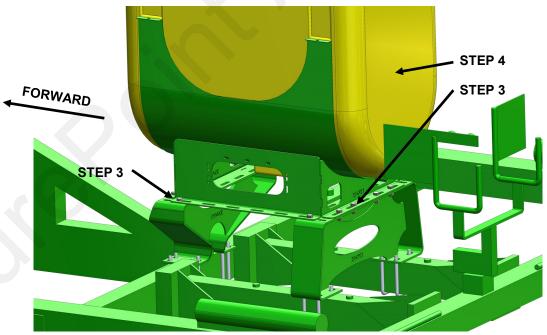

- 3. Mount the Tank Cradle (421-2763Y1) to the Tank Stands as shown in picture above with the provided 5/8" Bolts (300-100108-5) and Flange Nuts (323-10). Fully tighten all Nuts and U-bolts.
- 4. Insert the tank into the Cradle and fasten it to the Cradle using the 2" Strap Kit (525-2055). The Tank Straps will possibly need to be re-tightened after re-filling the tank due to expansion and contraction.