

396-6547Y1 High Rate GEN3 Liquishift Plumbing Instructions

High Rate - Flow Indicator and Sentinel Plumbing Kits





Kit Number	Flow Indicator Kits
522-11-000500	Plumbing Kit, HIGH RATE Gen3 Liquishift, 11 Row, 1/2" Hose, Flow Indicator
522-12-000700	Plumbing Kit, HIGH RATE Gen3 Liquishift, 12 Row, 1/2" Hose, Flow Indicator
522-13-000500	Plumbing Kit, HIGH RATE Gen3 Liquishift, 13 Row, 1/2" Hose, Flow Indicator
522-15-000500	Plumbing Kit, HIGH RATE Gen3 Liquishift, 15 Row, 1/2" Hose, Flow Indicator
522-16-000700	Plumbing Kit, HIGH RATE Gen3 Liquishift, 16 Row, 1/2" Hose, Flow Indicator
522-23-000500	Plumbing Kit, HIGH RATE Gen3 Liquishift, 23 Row, 1/2" Hose, Flow Indicator
522-24-000700	Plumbing Kit, HIGH RATE Gen3 Liquishift, 24 Row, 1/2" Hose, Flow Indicator
522-25-000500	Plumbing Kit, HIGH RATE Gen3 Liquishift, 25 Row, 1/2" Hose, Flow Indicator
Kit Number	Sentinel Kits
522-11-000600	Plumbing Kit, HIGH RATE Gen3 Liquishift, 11 Row, 1/2" Hose, Sentinel
522-12-000800	Plumbing Kit, HIGH RATE Gen3 Liquishift, 12 Row, 1/2" Hose, Sentinel
522-13-000600	Plumbing Kit, HIGH RATE Gen3 Liquishift, 13 Row, 1/2" Hose, Sentinel
522-15-000600	Plumbing Kit, HIGH RATE Gen3 Liquishift, 15 Row, 1/2" Hose, Sentinel
522-16-000800	Plumbing Kit, HIGH RATE Gen3 Liquishift, 16 Row, 1/2" Hose, Sentinel
522-23-000600	Plumbing Kit, HIGH RATE Gen3 Liquishift, 23 Row, 1/2" Hose, Sentinel
522-24-000800	Plumbing Kit, HIGH RATE Gen3 Liquishift, 24 Row, 1/2" Hose, Sentinel
522-25-000600	Plumbing Kit, HIGH RATE Gen3 Liquishift, 25 Row, 1/2" Hose, Sentinel



Sentinel Kits Parts List

Parts List for Kit [522-12-000600 — Plumbing Kit, HIGH RATE Gen3 Liquishift, 12 Row, 1/2" Hose, Sentinel] shown. Quantities vary with different Row Count Kits.

Item Number	Description	QTY	U Of N
103-4845Y1	Zip Valve 3/8" Nylon, 2-way, SS Ball, QD Style fittings, Deutsch Connector	13	each
117-QD050	TX2 Series 1/2" HB x female QD fitting - Straight	24	each
120-T4FCAP	Fork Fitting, T4 Female Cap	4	each
120-T4FT3MT4MTEE	Fork Fitting, T4F x T3M x T4M Modular Manifold Tee	6	each
121-T1M050	Fork Fitting, T1M x 1/2" HB, 10mm ID	24	each
121-T3F050-90	Fork Fitting, T3F x 1/2" HB - 90°	6	each
121-T4M100	Fork Fitting, T4M x 1" HB	4	each
204-01-4625AAGB1B1	4 Row Electro Magnetic Sentinel Flow Meter (10oz to 202 oz per min per row) .08 - 1.6 GPM	3	each
113-05-038	Plug - 3/8" QC	0	each
120-T1M038QC	Fork Fitting, T1M x 3/8" QC	0	each
280-050-AG200-100	1/2" AG200 100' Coil	2	each
280-100-AG100	1" AG200 Bulk	40	feet
350-0605	SS Hose Clamp - Size 6 - 7/8" Diameter (fits 3/8" and 1/2" AG200)	110	each
350-1608	SS Hose Clamp - Size 16 - 1-1/2" Diameter (fits 1" AG200)	10	each
353-ZT07LS	Ziptag Kit, Qty 20 Blue and Orange Hose Label Kit, Liquid Systems	1	each
384-1105	Hardware Kit - Qty 4 of 5/16" Hex Cap Bolts and Flange Nuts for Sentinel Flow meter	6	each
399-PM80128	128 oz Calibration Pitcher with SurePoint Logo	1	each
353-15	15" Zip Tie	2	PKG 100
15-200TEE	2" Manifold Tee	2	each
105-200150BRB	2" Manifold x 1-1/2" HB	2	each
105-200100BRB	2" Manifold x 1" HB	4	each
105-FC200	2" Manifold Clamp	6	each
105-150G-H	1-1/2" EPDM Manifold Gasket for 200 Series Manifold fittings	6	each
350-PS238	Pressure Seal HD Clamp, Size 238 - 1.625" - 2.125" (1-1/4" - 1-1/2" ENF, WBS or AG200 hose)	4	each
396-6547Y1	High Rate GEN3 Liquishift Plumbing Instructions	1	each



Flow Indicator Kits Parts List

Parts List for Kit [522-12-000500 — Plumbing Kit, HIGH RATE Gen3 Liquishift, 12 Row, 1/2" Hose, Flow Indicator] shown. Quantities vary with different Row Count Kits.

Description	QTY	U Of M
Zip Valve 3/8" Nylon, 2-way, SS Ball, QD Style fittings, Deutsch Connector	13	each
TX2 Series 1/2" HB x female QD fitting - Straight	24	each
Fork Fitting, T4 Female Cap	4	each
Fork Fitting, T4F x T3M x T4M Modular Manifold Tee	6	each
Fork Fitting, T3F x 1/2" HB - 90°	24	each
Fork Fitting, T4M x 1" HB	6	each
RadialLock Cap with 1/2" hb (needs 40160 oring)	4	each
Wilger O-ring Seal	3	each
1/2" AG200 100' Coil	0	each
1" AG200 Bulk	0	feet
SS Hose Clamp - Size 6 - 7/8" Diameter (fits 3/8" and 1/2" AG200)	2	each
SS Hose Clamp - Size 16 - 1-1/2" Diameter (fits 1" AG200)	40	each
Ziptag Kit, Qty 20 Blue and Orange Hose Label Kit, Liquid Systems	110	each
Hardware Kit - Wilger Mounting Bolts	10	each
128 oz Calibration Pitcher with SurePoint Logo	1	each
Flow Indicator Assembly - Isolated Feed(Body, Retainer, Lock U-Clips, Balls)	6	each
ORS x 1/2" HB - 90 Degree	1	each
15" Zip Tie	2	each
2" Manifold Tee	2	each
2" Manifold x 1-1/2" HB	2	each
2" Manifold x 1" HB	4	each
2" Manifold Clamp	6	each
1-1/2" EPDM Manifold Gasket for 200 Series Manifold fittings	6	each
Pressure Seal HD Clamp, Size 238 - 1.625" - 2.125" (1-1/4" - 1-1/2" ENF, WBS or AG200 hose)	4	each
High Rate GEN3 Liquishift Plumbing Instructions	1	each
	Zip Valve 3/8" Nylon, 2-way, SS Ball, QD Style fittings, Deutsch Connector TX2 Series 1/2" HB x female QD fitting - Straight Fork Fitting, T4 Female Cap Fork Fitting, T4F x T3M x T4M Modular Manifold Tee Fork Fitting, T3F x 1/2" HB - 90° Fork Fitting, T4M x 1" HB RadialLock Cap with 1/2" hb (needs 40160 oring) Wilger O-ring Seal 1/2" AG200 100' Coil 1" AG200 Bulk SS Hose Clamp - Size 6 - 7/8" Diameter (fits 3/8" and 1/2" AG200) SS Hose Clamp - Size 16 - 1-1/2" Diameter (fits 1" AG200) Ziptag Kit, Qty 20 Blue and Orange Hose Label Kit, Liquid Systems Hardware Kit - Wilger Mounting Bolts 128 oz Calibration Pitcher with SurePoint Logo Flow Indicator Assembly - Isolated Feed(Body, Retainer, Lock U-Clips, Balls) ORS x 1/2" HB - 90 Degree 15" Zip Tie 2" Manifold Tee 2" Manifold Tee 2" Manifold Zimp 1-1/2" EPDM Manifold Gasket for 200 Series Manifold fittings Pressure Seal HD Clamp, Size 238 - 1.625" - 2.125" (1-1/4" - 1-1/2" ENF, WBS or AG200 hose)	Zip Valve 3/8" Nylon, 2-way, SS Ball, QD Style fittings, Deutsch Connector TX2 Series 1/2" HB x female QD fitting - Straight Fork Fitting, T4 Female Cap Fork Fitting, T4F x T3M x T4M Modular Manifold Tee Fork Fitting, T3F x 1/2" HB - 90° Every Fitting, T4M x 1" HB RadialLock Cap with 1/2" hb (needs 40160 oring) Wilger O-ring Seal 1/2" AG200 100' Coil "AG200 Bulk SS Hose Clamp - Size 6 - 7/8" Diameter (fits 3/8" and 1/2" AG200) SS Hose Clamp - Size 16 - 1-1/2" Diameter (fits 1" AG200) Ziptag Kit, Qty 20 Blue and Orange Hose Label Kit, Liquid Systems 110 Hardware Kit - Wilger Mounting Bolts 128 oz Calibration Pitcher with SurePoint Logo Flow Indicator Assembly - Isolated Feed(Body, Retainer, Lock U-Clips, Balls) ORS x 1/2" HB - 90 Degree 15" Zip Tie 2" Manifold Tee 2" Manifold X 1" HB 2" Manifold Clamp Fressure Seal HD Clamp, Size 238 - 1.625" - 2.125" (1-1/4" - 1-1/2" ENF, WBS or AG200 hose)

SurePoint Ag Systems

High Rate Tube Kits

High Rate Plumbing Kits will be shipped with pre-assembled High Rate Tube Kits. The correct tube kits will be selected for your specific application. Tube Kits vary in meter tube color combinations, meter tube length (typically 8' or 5'), and row count (the combination of which will add up to your to total rows installed. Below is the list of High Rate Tube Kits available for selection and an example parts list from the 3 different row variations.

NOTE: High Rate Tube Kits have 1/2" Hose Barb on the inlet end and 1/2" hose on the outlet end of each pre-assembly

Kit Item Number	Kit Description
523-02-120600	5' Tube Fitting Kit for 2 Rows, HIGH RATE, 1/2" HB inlet, 1/2" Hose outlet
523-02-800600	8' Tube Fitting Kit for 2 Rows, HIGH RATE, 1/2" HB inlet, 1/2" Hose outlet
523-03-120600	5' Tube Fitting Kit for 3 Rows, HIGH RATE, 1/2" HB inlet, 1/2" Hose outlet
523-03-800600	8' Tube Fitting Kit for 3 Rows, HIGH RATE, 1/2" HB inlet, 1/2" Hose outlet
523-04-120600	5' Tube Fitting Kit for 4 Rows, HIGH RATE 1/2" HB inlet, 1/2" Hose outlet
523-04-800600	8' Tube Fitting Kit for 4 Rows, HIGH RATE, 1/2" HB inlet, 1/2" Hose outlet

Variable Rate Technology

Gen3 LiquiShift Metering Tube Combo HIGH RATE Kit for 4 Rows

Kit: 523-04-120600 or 523-04-800600 **Tube Fitting Kit for 4 Rows**

Route to Flow Indicators / Sentinel Flow Module

285-050-6519Y1

1/2" AG200 Bulk - 20" Length

350-0605 SS Hose Clamp - Size 6 - 7/8" Diameter

113-01-038050

Stem to HB - 3/8" Stem x 1/2" HB

113-19-038038038

Y Divider - 3/8" QC x 3/8" QC x 3/8" QC

113-03-038025

Stem Reducer - 3/8" Stem x 1/4" QC

Shown for illustration purposes only. Typical metering tube length is 5ft or 8 ft.

1/2" HB x 4-way 1/4" QC Splitter Final Assembly

Route 1/2" hose from manifold assembly to LiquiShift Tubes

> Plumb to"A" Valves Smaller DIA Metering Tubes


Plumb to"B" Valves Larger DIA **Metering Tubes**



LiquiShift Metering Tube Combo HIGH RATE Kits for 2 or 3 rows

Kit: 523-02-120600 or 523-02-800600 **Tube Fitting Kit for 2 Rows**

Kit: 523-03-120600 or 523-03-800600 **Tube Fitting Kit for 3 Rows**

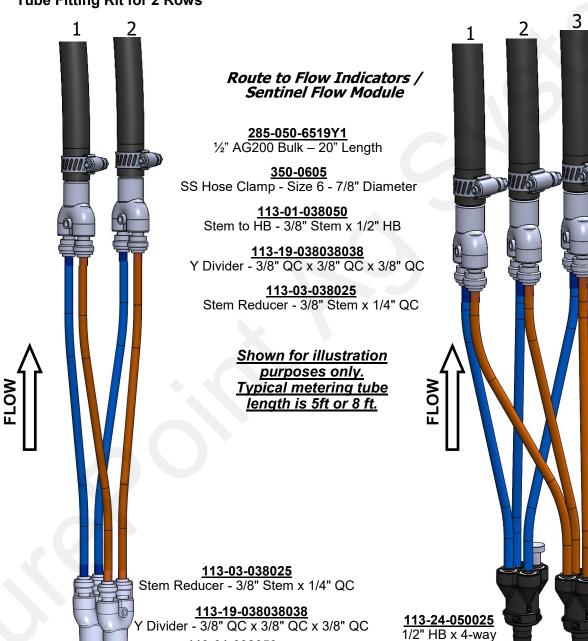

Plumb to"A" Valves Larger DIA Metering Tubes

Plumb to"B" Valves Smaller DIA Metering Tubes

113-01-038050

Stem to HB - 3/8" Stem x 1/2" HB

Route 1/2" hose from manifold assembly to LiquiShift Tubes

Plumb to"A" Valves Larger DIA Metering Tubes

1/4" QC Splitter Final

Plumb to"B" Valves Smaller DIA

113-05-025 1/4" QC Plug


High Rate GEN3 Liquishift Plumbing Instruction Sheet

Page 6 © 2024 SurePoint Ag Systems, Inc. Metering Tubes



High Rate Flowmeter Plumbing Kit Assembly Highlights

- 1. Flowmeter High Rate plumbing kits use [121-T1M050 Fork Fitting, T1M x 1/2" HB, 10mm ID] use straight 1/2" HB connections on the inlet and outlet of the flow meter to reduce pressure loss
- 2. Inlet hose from preassembled Meter Tube Kits will require purposeful routing, gathering and securing to allow each hose to make a smooth and unkinked transition over the T-Bracket to the top of the flowmeter.
- 3. Row Hose will be routed down the T-Bracket and out to each row unit
- 4. Preassembled Meter Tube Kits each come with a 3/8" x 3/8" x 3/8" Y connector attached to a 20" long x 1/2" hose piece to enable a smooth transition to the top of the flowmeter. These 20" hose pieces may be trimmed in installation as required for an organized hose bundle.

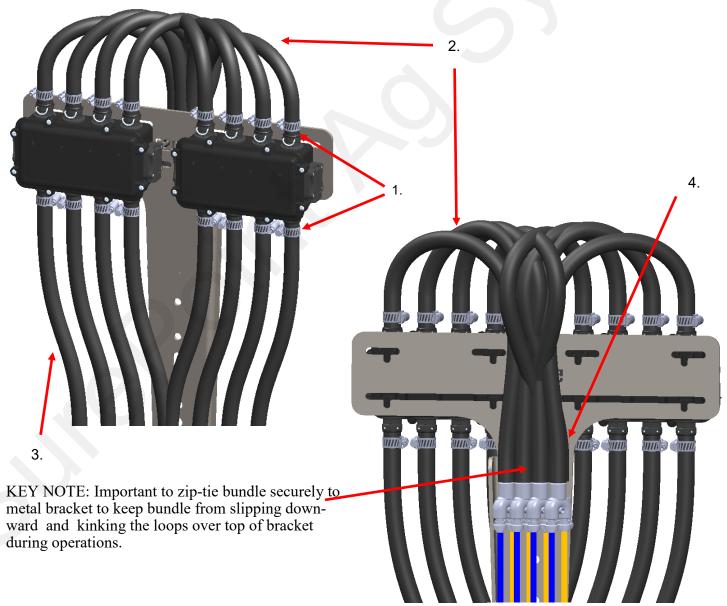

Page 7 © 2024 SurePoint Ag Systems, Inc.



High Rate Flow Indicator Plumbing Kit Assembly Highlights

- 1. Flow Indicator High Rate plumbing kits use a straight 1/2" HB connection on the inlet and a 90° 1/2" HB outlet connection on the top of each indicator to reduce pressure loss.
- 2. Inlet hose from preassembled Meter Tube Kits will require purposeful routing, gathering and securing to allow each hose to make a smooth and unkinked transition up into the bottom of the flow indicators.
- 3. Row Hose will be routed down the T-Bracket and out to each row unit
- 4. Preassembled Meter Tube Kits each come with a 3/8" x 3/8" x 3/8" Y connector attached to a 20" long x 1/2" hose piece to enable a smooth transition to each flow indicator inlet. These 20" hose pieces may be trimmed in installation as required for an organized hose and tube bundle.



Page 8 © 2024 SurePoint Ag Systems, Inc.


Gen3 LiquiShift Individual Row On/Off Valve



Gen3 LiquiShift installation is the cleanest when Flow Indicators / Sentinel Flowmeter Modules are distributed across the toolbar.

Valve P/N: 103-4845Y1 — Zip Valve 3/8" Nylon, 2-way, SS Ball, QD Style fittings, Deutsch Connector.

- Route 1/2" hose from the Flow Indicator or Sentinel Flowmeter Module to the row unit. Avoid pinch points on the planter and allow for row unit travel.
- 2. Route 1/2" hose from the Zip Valve to the placement device

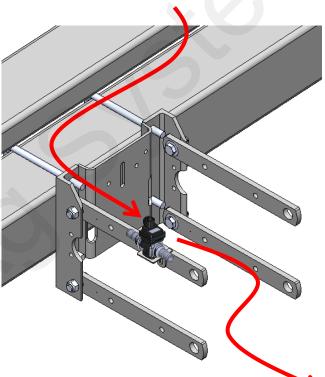

515-01-300100 - Parallel Arm Zip Valve Mounting Kit


Bracket and Hardware to mount the Zip Valve to the row unit parallel arm

515-01-300200 - Parallel Arm Zip Valve Mounting Kit for Dual Product

Bracket and Hardware to mount (2) Zip Valves to the row unit parallel arm for a dual



Revised: 3/6/2024

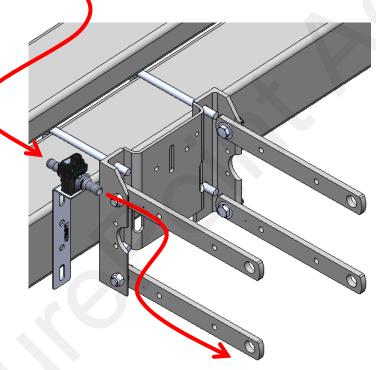

515-01-300300 - Toolbar Zip Valve Mounting Kit
Bracket and Hardware to mount the Zip Valve to toolbar
(Fits up to 8x8 toolbar)

Bracket and Hardware to mount (2) Zip Valves to toolbar



High Rate Section Zip Valve Assembly Highlights

- To reduce pressure loss, High Rate Plumbing Kits use a larger zip valve for on/off control of a row/section. [103-4845Y1 — Zip Valve 3/8" Nylon, 2-way, SS Ball, QD Style fittings, Deutsch Connector]
- 2. The inlet and outlet of the valve is connected using a fork-style TX2 female x Straight 1/2" HB fitting. [117-QD050 TX2 Series 1/2" HB x female QD fitting Straight]

